


SET TREE PLUMB AND MAINTAIN THROUGHOUT WARRANTY PERIOD. REMOVAL ALL FLAGGING AND LABELS.

PRUNE BRANCHES TO A MINIMUM OF 5' TO ALLOW FOR A CLEAR SIGHT DISTANCE.

EACH TREE MUST BE PLANTED SUCH THAT THE ROOT FLARE IS VISIBLE AT THE TOP OF THE ROOT BALL.

MULCH AS SPECIFIED, DO NOT PLACE MULCH IN CONTACT WITH TREE TRUNK.

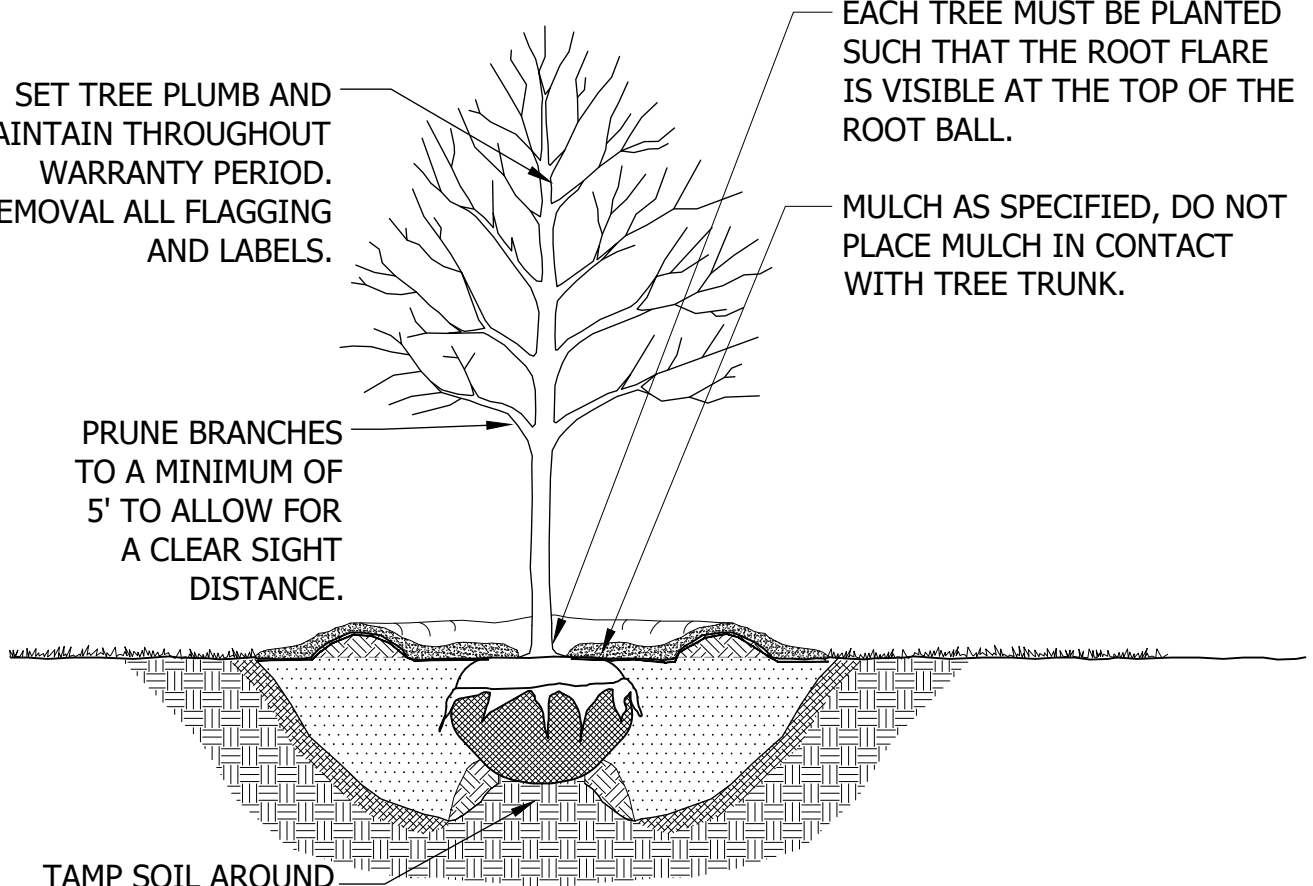

TAMP SOIL AROUND BASE OF ROOT BALL FIRMLY WITH FOOT PRESSURE SO THAT ROOT BALL DOES NOT SHIFT. PLACE ROOT BALL ON FIRM UNEXCAVATED OR TAMPED SOIL.

**NOTES:**

1. STAKE TREES ONLY AS SPECIFIED AT THE DIRECTION OF ENGINEER.
2. SET TOP OF ROOT BALL FLUSH TO GRADE OR 1-2 IN. HIGHER IN SLOWLY DRAINING SOILS.



**STANDARD DETAILS**

TYPICAL DECIDUOUS TREE  
PLANTING

COTTAGE GROVE, MINNESOTA

JANUARY 2021

PLATE NO.  
LAN-2